

# AXIS 210/210A Network Cameras

*Superior video quality for professional indoor applications*

The AXIS 210 and AXIS 210A Network Cameras from the market leader in network video, are ideal for indoor surveillance and remote monitoring.

The network cameras provide the best image quality in their class, using a progressive scan CCD sensor and powerful real-time image processing hardware to guarantee full frame rate, even at VGA resolution. Connecting directly to IP networks, the built-in Web server, open application interface, and sophisticated networking functions based on open industry standards greatly simplify systems integration.

The AXIS 210A, with built-in Power over Ethernet – which enables power to be delivered to the camera via the network – reduces cabling requirements and installation costs, and consolidates power for higher reliability. Its additional integrated audio support including built-in microphone, enables remote users to not only view, but also listen in on an area and communicate orders or requests to visitors or intruders via two-way audio communication.

The AXIS 210 and AXIS 210A provide the perfect solution for securing offices, shops, schools and other facilities over the local area network or across the Internet.



- Superior image quality using progressive scan CCD and advanced video processing
- Simultaneous Motion JPEG and MPEG-4 streams optimize for quality and bandwidth
- Up to 30 frames per second in VGA 640 x 480 resolution
- Built-in motion detection with pre- and post-alarm image buffering
- Power over Ethernet support (IEEE 802.3af) simplifies installation (AXIS 210A)
- Integrated two-way audio support (AXIS 210A)

# AXIS 210/210A Network Cameras



AXIS 210A Network Camera

## Specifications

<b>Models</b>	AXIS 210 AXIS 210A: Built-in Power over Ethernet and two-way audio	<b>Operating conditions</b>	5 - 45 °C (41 - 113 °F) Humidity 20 - 80% RH (non-condensing)
<b>Image Sensor</b>	1/4" Sony Wfine progressive scan RGB CCD	<b>Installation, management and maintenance</b>	Installation tool on CD and web-based configuration Configuration backup and restore SNMP support (AXIS 210A) Firmware upgrades over HTTP or FTP, firmware available at <a href="http://www.axis.com">www.axis.com</a>
<b>Lens</b>	4.0 mm, F1.2, fixed iris, horizontal viewing angle: 48°, focus range: 0 mm to infinity, CS mount	<b>Video access from Web browser</b>	Camera live view, sequence tour capability for up to 20 Axis cameras, customizable HTML pages
<b>Minimum illumination</b>	1.0 lux, F1.2	<b>Minimum Web browsing requirements</b>	Pentium III CPU 500 MHz or higher, or equivalent AMD 128 MB RAM Windows XP, 2000, Server 2003, DirectX 9.0 or later Internet Explorer 6.x or later For other operating systems and browsers see <a href="http://www.axis.com/techsup">www.axis.com/techsup</a>
<b>Video compression</b>	Motion JPEG MPEG-4 Part 2 (ISO/IEC 14496-2), Profiles: ASP and SP	<b>System integration support</b>	Powerful API for software integration available at <a href="http://www.axis.com">www.axis.com</a> , including HTTP API, AXIS Media Control SDK, event trigger data in video stream, embedded scripting Watchdog secures continuous operation, can be monitored by other systems via event notification Embedded operating system: Linux 2.4
<b>Resolutions</b>	16 resolutions from 640 x 480 to 160 x 120 via API, 5 selections via configuration web page	<b>Supported protocols</b>	IP, HTTP, TCP, ICMP, RTSP, RTP, UDP, IGMP, RTCP, SMTP, FTP, DHCP, UPnP, ARP, DNS, DynDNS, SOCKS, NTP etc. In addition for AXIS 210A: HTTPS, SSL/TLS*, SNMPv1/v2c/v3 (MIB-II). More information on protocol usage available at <a href="http://www.axis.com">www.axis.com</a> <i>*This product includes software developed by the Open SSL Project for use in the Open SSL Toolkit.</i>
<b>Frame rate</b>	Up to 30 frames per second in all resolutions	<b>Video management software (not incl.)</b>	AXIS Camera Station - Surveillance application for viewing, recording and archiving up to 25 cameras AXIS Camera Management - Video installation and management tool. Download for free at <a href="http://www.axis.com">www.axis.com</a> AXIS Camera Explorer - Basic software for viewing and manual recording  See <a href="http://www.axis.com/partner/adp_partners.htm">www.axis.com/partner/adp_partners.htm</a> for more software applications via partners
<b>Video streaming</b>	Simultaneous Motion JPEG and MPEG-4 Controllable frame rate and bandwidth Constant and variable bit rate (MPEG-4)	<b>Included Accessories</b>	Power supply 9 V DC, stand, connector kit, Installation Guide, CD with installation tool, software and User's Manual, MPEG-4 licenses (1 encoder, 1 decoder), MPEG-4 decoder (Windows)
<b>Image settings</b>	Compression levels: 11 (Motion JPEG)/23 (MPEG-4) Rotation: 90°, 180°, 270° Configurable color level, brightness, contrast, exposure, white balance, fine tuning of behavior at low light Overlay capabilities: time, date, privacy mask, text or image	<b>Accessories (not incl.)</b>	AXIS 292 Network Video Decoder AXIS MPEG-4 Decoder 10 user license pack Power over Ethernet midspans
<b>Audio (AXIS 210A)</b>	Configurable for built-in or external microphone G.711 PCM 64 kbit/s, G.726 ADPCM 32 or 24 kbit/s, full duplex, half duplex, simplex or audio off	<b>Approvals</b>	EN55024, EN55022: Class B, EN61000-3-2, EN61000-3-3 FCC Part 15 Subpart B Class B, VCCI Class B ITE, C-tick AS/NZS 3548 and ICES-003 B by compliance with EN55022:Class B, EN60950 Power supply: UL, CSA and EN60950
<b>Shutter time</b>	2 sec to 1/12500 sec	<b>Dimensions (HxWxD) and weight</b>	38 x 88 x 157 mm (1.5" x 3.4" x 6.2") AXIS 210: 305 g (10.8 oz) excl. power supply AXIS 210A: 325 g (11.5 oz) excl. power supply
<b>Security</b>	Multiple user access levels with password protection IP address filtering, HTTPS encryption (AXIS 210A)		
<b>Users</b>	20 simultaneous users Unlimited users using multicast (MPEG-4)		
<b>Alarm and event management</b>	Events triggered by built-in motion detection, external input or according to a schedule Image upload over FTP, email and HTTP Notification over TCP, email, HTTP and external output Pre- and post alarm buffer: AXIS 210: 1.2 MB (up to 40 sec of 320x240 video at 4 frames per sec) AXIS 210A: 9 MB (up to 5 min of 320x240 video at 4 frames per sec)		
<b>Connectors</b>	Ethernet 10BaseT/100BaseTX, RJ-45 Terminal block for I/O (1 alarm input, 1 output) and alternative power connection AXIS 210A: 3.5 mm jack for Mic in (max 270 mVpp) or Line mono input (max 8.0 Vpp), 3.5 mm jack for Line mono output (max 3.0 Vpp) to active speaker		
<b>Processors, memory and clock</b>	CPU: ETRAX 100LX 32bit Video processing and compression: ARTPEC-2 RAM: 32 MB (AXIS 210A), 16 MB (AXIS 210) Flash: 8 MB (AXIS 210A), 4 MB (AXIS 210) Battery backed up real-time clock		
<b>Power</b>	7-20 V DC max 5 W, or (AXIS 210A) Power over Ethernet (IEEE 802.3af)		




Interlaced, 20 ms difference between odd and even lines



Progressive Scan, all lines are captured at the same time

Progressive scan is used instead of the interlaced method found in analog CCTV (PAL/NTSC) cameras. With progressive scan all pixels (lines) are captured at the same time, enabling moving images to be presented without distortion.

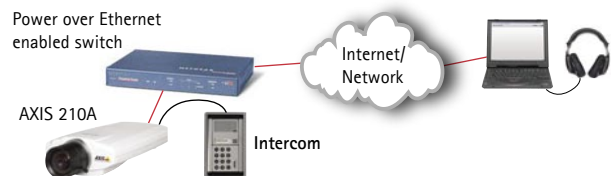

Cabling requirements and installation costs are reduced by the built-in support for Power over Ethernet and audio, enabling power to the cameras and two-way audio for the AXIS 210A to be delivered over the network.