

# AXIS 221 Day & Night Network Camera

*High performance, professional day and night network camera*

The AXIS 221 Day & Night Network Camera is a high performance camera for professional surveillance and remote monitoring. AXIS 221 is designed to meet demanding security installations under all light conditions and is supported by the industry's largest base of application software for video and alarm management.

Thanks to the high-quality Pentax lens and progressive scan CCD (non-interlaced) image sensor, this camera delivers crisp, clear images even of objects moving at high speed in the dark. The AXIS 221 features a removable infrared cut filter, which enables color video in high and low light conditions as well as IR sensitive black/white video at night.

The integrated Power over Ethernet option eliminates the need for a power outlet, as power is supplied to the camera via the network cable, and a steady power stream can be guaranteed with a UPS (Uninterruptible Power Supply). Furthermore, the unique combination of simultaneous Motion JPEG and MPEG-4 streams allows systems to be optimized for both image quality and bandwidth-efficiency. Additionally, the product offers a complete set of security features such as multi-level password protection, IP address filtering and HTTPS encryption. The support for HTTPS provides a secure channel between camera and application and enables authentication of the video source.



- IR sensitivity for high quality images in low light conditions
- Progressive Scan provides full resolution images of moving objects, without distortions
- Power over Ethernet (IEEE 802.3af)
- Up to 45 frames per second in VGA 640 x 480 resolution
- Simultaneous Motion JPEG and MPEG-4
- Multi-window motion detection



**AXIS**<sup>®</sup>  
COMMUNICATIONS  
Make your network smarter

# AXIS 221 Day & Night Network Camera



## Specifications

<b>Image Sensor</b>	1/3" Sony Wfine progressive scan RGB CCD	<b>Installation, management and maintenance</b>	Installation tool on CD and web-based configuration Configuration backup and restore Firmware upgrades over HTTP or FTP, firmware available at <a href="http://www.axis.com">www.axis.com</a>
<b>Lens</b>	Pentax TS3V310ED, F1.0 varifocal 3.0 - 8.0 mm, DC-iris, horizontal viewing angle: 35°-93°, focus range: 0.3 m to infinity. CS mount	<b>Video access from Web browser</b>	Camera live view, sequence tour capability for up to 20 Axis cameras, customizable HTML pages
<b>Minimum illumination</b>	Color mode: 0.65 lux, F1.0 Black and white mode: 0.08 lux, F1.0	<b>Minimum Web browsing requirements</b>	Pentium III CPU 500 MHz or higher, or equivalent AMD 128 MB RAM AGP graphic card, Direct Draw, 32 MB RAM Windows XP, 2000, NT4.0*, ME* or 98*, DirectX 9.0 or later Internet Explorer 5.x or later. For other operating systems and browsers see <a href="http://www.axis.com/techsup">www.axis.com/techsup</a> *Motion JPEG only
<b>Video compression</b>	Motion JPEG MPEG-4 Part 2 (ISO/IEC 14496-2), Profiles: ASP and SP	<b>System integration support</b>	Powerful API for software integration available at <a href="http://www.axis.com">www.axis.com</a> , including HTTP API, AXIS Media Control SDK, event trigger data in video stream, embedded scripting and access to serial port peripherals over HTTP/TCP. Watchdog secures continuous operation, can be monitored by other systems via event notification. Embedded operating system: Linux 2.4
<b>Resolutions</b>	16 resolutions from 640 x 480 to 160 x 120 via API, 5 selections via configuration web page	<b>Supported protocols</b>	IP, HTTP, HTTPS, SSL/TLS*, TCP, ICMP, SNMPv1/v2c/v3 (MIB-II), RTSP, RTP, UDP, IGMP, RTPC, SMTP, FTP, DHCP, UPnP, ARP, DNS, DynDNS, SOCKS, NTP etc. More information on protocol usage available at <a href="http://www.axis.com">www.axis.com</a> <i>*This product includes software developed by the Open SSL Project for use in the Open SSL Tool kit (<a href="http://www.openssl.org/">http://www.openssl.org/</a>)</i>
<b>Frame rate</b>	Motion JPEG: Up to 45 fps at 640x480 60 fps at 480x360 or lower MPEG-4: Up to 24 fps at 640x480 30 fps at 480x360 or lower	<b>Applications (not incl.)</b>	AXIS Camera Station - Surveillance application for viewing, recording and archiving up to 25 cameras AXIS Camera Management - Video installation and management tool. Download for free at <a href="http://www.axis.com">www.axis.com</a> AXIS Camera Explorer - Basic software for viewing and manual recording See <a href="http://www.axis.com/partner/adp_partners.htm">www.axis.com/partner/adp_partners.htm</a> for more software applications via partners
<b>Video streaming</b>	Simultaneous Motion JPEG and MPEG-4 Controllable frame rate and bandwidth Constant and variable bit rate (MPEG-4)	<b>Included Accessories</b>	Power supply 9 V DC, stand, connector kit, Installation Guide, CD with installation tool, software and User's Manual. MPEG-4 decoder (Windows), MPEG-4 licences (1 encoder, 1 decoder)
<b>Image settings</b>	Compression levels: 11 (Motion JPEG)/23 (MPEG-4) Rotation: 90°, 180°, 270° Configurable color level, brightness, sharpness, contrast, white balance, exposure control, exposure area, backlight compensation, fine tuning of behavior at low light Overlay capabilities: time, date, privacy mask, text or image	<b>Accessories (not incl.)</b>	Housings for installation outdoors or in adverse indoor environments, Power over Ethernet midspans, IR Illuminators, AXIS 292 Network Video Decoder AXIS MPEG-4 Decoder 10 user license pack
<b>Shutter time</b>	2 sec to 1/25000 sec	<b>Approvals</b>	EMC: EN55024: 1998+A1+A2, EN61000-6-1: 2001, EN61000-6-2: 2001, EN55022: 1998+A1 Class B, EN61000-3-2: 2000, EN61000-3-3: 1995+A1 FCC Part 15 Subpart B Class B by compliance with EN55022: 1998 Class B, VCCI: 2003 Class B ITE, C-tick AS/NZS 3548 and ICES-003 B by compliance with EN55022: 1998 Class B Safety: UL and CSA (Power supply), EN60950
<b>Security</b>	Multiple user access levels with password protection IP address filtering, HTTPS encryption	<b>Dimensions (HxWxD) and weight</b>	49 x 88 x 186 mm (1 <sup>15</sup> / <sub>16</sub> " x 3 <sup>15</sup> / <sub>32</sub> " x 7 <sup>5</sup> / <sub>16</sub> " ) 550 g (19 <sup>13</sup> / <sub>32</sub> oz) excl. power supply
<b>Users</b>	20 simultaneous users Unlimited number of users using multicast (MPEG-4)		
<b>Alarm and event management</b>	Built-in multi-window motion detection, external I/O, triggered and scheduled events with several notification options, pre- and post alarm buffer 9 MB (approx 5 min of 320 x 240 video at 4 frames per sec)		
<b>Connectors</b>	Ethernet 10BaseT/100BaseTX, RJ-45 2 alarm inputs, 1 output (Terminal block), RS-485/422 half duplex port and alternative power connection D-sub for RS-232 port		
<b>Processors, memory and clock</b>	CPU: ETRAX 100LX 32bit Video processing and compression: ARTPEC-2 RAM: 32 MB, Flash: 8 MB Battery backed up real-time clock		
<b>Power</b>	7-24 V DC, max 5.5 W 10-24 V AC, max 7.5 VA Power over Ethernet (IEEE 802.3af) with power classification according to Class 2		
<b>Operating conditions</b>	5 - 50 °C (41 - 122 °F) Humidity 20 - 80% RH (non-condensing)		
<b>Temperature warning</b>	Warning issued when temperature is below or above limits		




Interlaced, 20 ms difference between odd and even lines



Progressive Scan, all lines are captured at the same time

Progressive scan is used instead of the interlaced method found in analog CCTV (PAL/NTSC) cameras. With progressive scan all pixels (lines) are captured at the same time, enabling moving images to be presented without distortion.

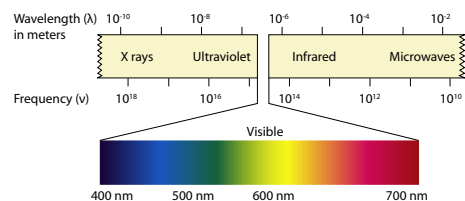

Light as perceived by the human eye ranges between wavelengths of ~400 - 700 nm. Infrared light exists in nature at higher wavelengths, which can not be perceived by the human eye. IR light is filtered away in the camera by an IR cut filter in order to render a "human image", AXIS 221 can thus produce high quality b/w pictures by removing the IR cut filter when light conditions are too dark to render colors.

[www.axis.com](http://www.axis.com)

**AXIS**  
COMMUNICATIONS  
Make your network smarter